

F-UVF


UV STABILIZED HEAT SEALABLE BOPET FILM

F-UVF is a co-extruded UV stabilized polyester film. The film is one side sealable surface other side Untreated.

KEY FEATURES:

- Very good clarity & transparency
- Excellent machinability & handling propertie
- Outstanding Exterior stability when exposed to sunlight

FILM STRUCTURE

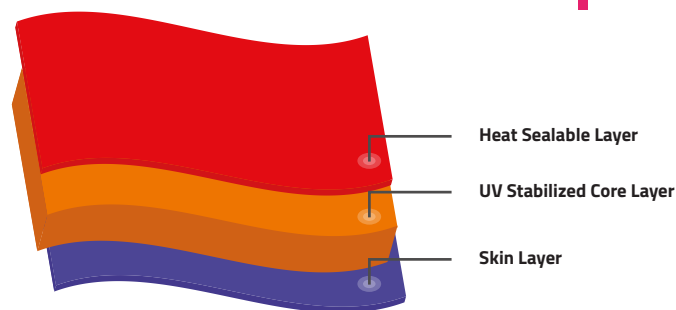

APPLICATION:

- Film is suitable for FRP application

| PROPERTIES | | TEST METHOD | UNIT | TYPICAL VALUES | | |
|---|----|-------------|-------------------------------|----------------|-----------|-----------|
| THICKNESS | | Internal | Micron | 15 | 23 | 36 |
| | | | (Gauge) | 60 | 92 | 144 |
| YIELD | | Internal | m ² / kg | 47.6 | 31 | 19.84 |
| | | | in ² /lb | 33550 | 21876 | 13978 |
| SURFACE TENSION (min) # (Heat Sealable Side) | | ASTM D-2578 | dyne/cm | 48 | | |
| COF (max) (One Side to Other Side) (Untreated to Untreated) | | ASTM D-1894 | - | 0.60 | 0.60 | 0.60 |
| HAZE (max) | | ASTM D-1003 | % | 4.5 | 5.0 | 5.5 |
| UV Absorbance @ 355 nm (min) | | Internal | % | 1.5 | 1.8 | 1.8 |
| TENSILE STRENGTH AT BREAK (min) | MD | ASTM D-882 | kg/cm ² | 1700 | 1600 | 1600 |
| | TD | | | 1900 | 2000 | 2000 |
| | MD | | (Psi) | 24200 | 22700 | 22700 |
| | TD | | | 28500 | 28500 | 28500 |
| ELONGATION AT BREAK (min) | MD | ASTM D-882 | % | 115 | 120 | 130 |
| | TD | | | 85 | 90 | 95 |
| HEAT SEAL TEMP. RANGE (service temp.) | | FIN SEAL | Internal | °C | 110 - 200 | 110 - 200 |
| SEAL STRENGTH (120°C, 1 sec, 2.8 bar) | | FIN SEAL | ASTM D-882 | gms/25mm | 600 | 800 |
| LINEAR SHRINKAGE (max) (30 Minute at 150°C) | MD | ASTM D-1204 | % | 3.0 | | |
| | TD | | | 1.0 | | |
| W.V.T.R. (38°C & 90% RH) (typical) | | ASTM F-1249 | gm/m ² /day | 40 | 30 | 20 |
| | | | (gm/100 in ² /day) | 2.6 | 2.0 | 1.3 |
| OTR (23°C & 0% RH) (typical) | | ASTM D-3985 | cc/m ² /day | 110 | 80 | 70 |
| | | | (cc/100 in ² /day) | 71.0 | 5.2 | 4.5 |

The inherent surface tension of the untreated side of any Pet film is minimum 42 dyne/cm

STORAGE & HANDLING

SELEXIBLE need to be stored in a warehouse below 35°C (95° F) and should not be exposed to direct sunlight, bright light sources or high humidity. If the material is stored in the recommended conditions, SELEXIBLE is suitable for use within 270 days from date of shipment

FOOD CONTACT

SELEXIBLE complies with EU and FDA regulations on plastic materials used for food grade application. Specific document and SDS are available on request.

DISCLAIMER

It is the responsibility of our customers to determine that their use of our products is safe, lawful, and technically suitable in their intended applications. The technical data sheets are provided for discussion purposes only. The customer may not rely on the data provided for any manufacturing purpose. The values provided in the technical data sheet represent typical values based on the best of our knowledge as of the date when the data was compiled. The data is offered solely to provide possible suggestions for your own experimentation and not as a guarantee for the material supplied. The user is solely responsible for the end use of the product and needs to perform their own tests to confirm the product suitability/compatibility in all respects. Flex provides no warranty and accepts no liability for any loss or fitness of the product for any specific purpose based on the information contained in the technical data sheets. Flex reserves the right to change the technical data sheet at any time without prior notice.



Manufacturing Facilities at No. 16
 Fengxiang Rd, Wujin District,
 Changzhou City, Jiangsu, China
 ✉ sale@selexible.cn
 www.selexibleplastic.com